

In cleared areas as dwg EP150/02:  
Cultivate and prepare ground, grass seed as Q30 water in and maintain until established to first cut

Retain and protect existing Sorbus

Retain and protect existing Field Maples

Access via Denholme Close

In cleared areas:  
Cultivate and prepare ground, grass seed as Q30 water in and maintain until established to first cut

WOODLAND AREA -  
NO WORKS ACCESS

Bulb planting Crocus  
tommassinianus 50/m<sup>2</sup> in season

Protect all existing surfaces to be retained. Boarding over, sheeving and full reinstatement if required

WOODLAND AREA -  
NO WORKS ACCESS

Grass seeding reinstatement to all areas of excavation, filling or grading

2 no. new trees size EHS species *Tilia cordata* 'Greenspire'

Install salvaged railings in new location, allow space for gate. Rub down and repaint black as M60

Existing climber and safety surface retained and protected during works

Install seat

Turf area 23m<sup>2</sup>

Existing swings retained

Existing swings retained

Install existing gate in new location, in line of railings, allow in fixing for height differential between railings

Bulb planting Crocus  
tommassinianus 50/m<sup>2</sup> in season

Install new bench to Q50 /220A

Turf area 104m<sup>2</sup> as Q30

Sutcliffe Nest Swing as Q50/ 350J  
Safagrass rubber tiles as Q26/ 340A over turf as Q30 laid on 100mm highly consolidated imported topsoil as Q28

Rebuild wall to new alignment, refix and paint existing wall mounted railings

Regrade bank, install 2 panels bow top railing with posts, retained from elsewhere on site. Rub down and paint black as M60

Bound crushed brick path 1.2m width as Q23/35 timber edging as Q23/310 Playdale 'Congo' climber as Q50/ 350E

Woodchip 300mm depth as Q26/320A; beneath 'Congo' and 'Springboard' enclosed by 200mm high timber log edging as Q40/400 on line shown. All over drainage layer, as dwg: EP150/ 04 total area 141m<sup>2</sup>



New litter bin as Q50/ 240

Sutcliffe Springboard as Q50/3500

Kompan steel 30m Cableway as Q50/350H product ref SPME49200 Allow for excavation necessary for installation of legs on level ground, excavated soil replaced to new contours shown, any surplus removed from site to tip

Safagrass rubber tiles as Q26/340A extent 62m<sup>2</sup> over-turf as Q30 laid on 100mm highly consolidated imported topsoil as Q28

Form mound after installation of Cableway, 950mm high, at level 78.5m flat area 3.0x1.0m at top, sides at gradient

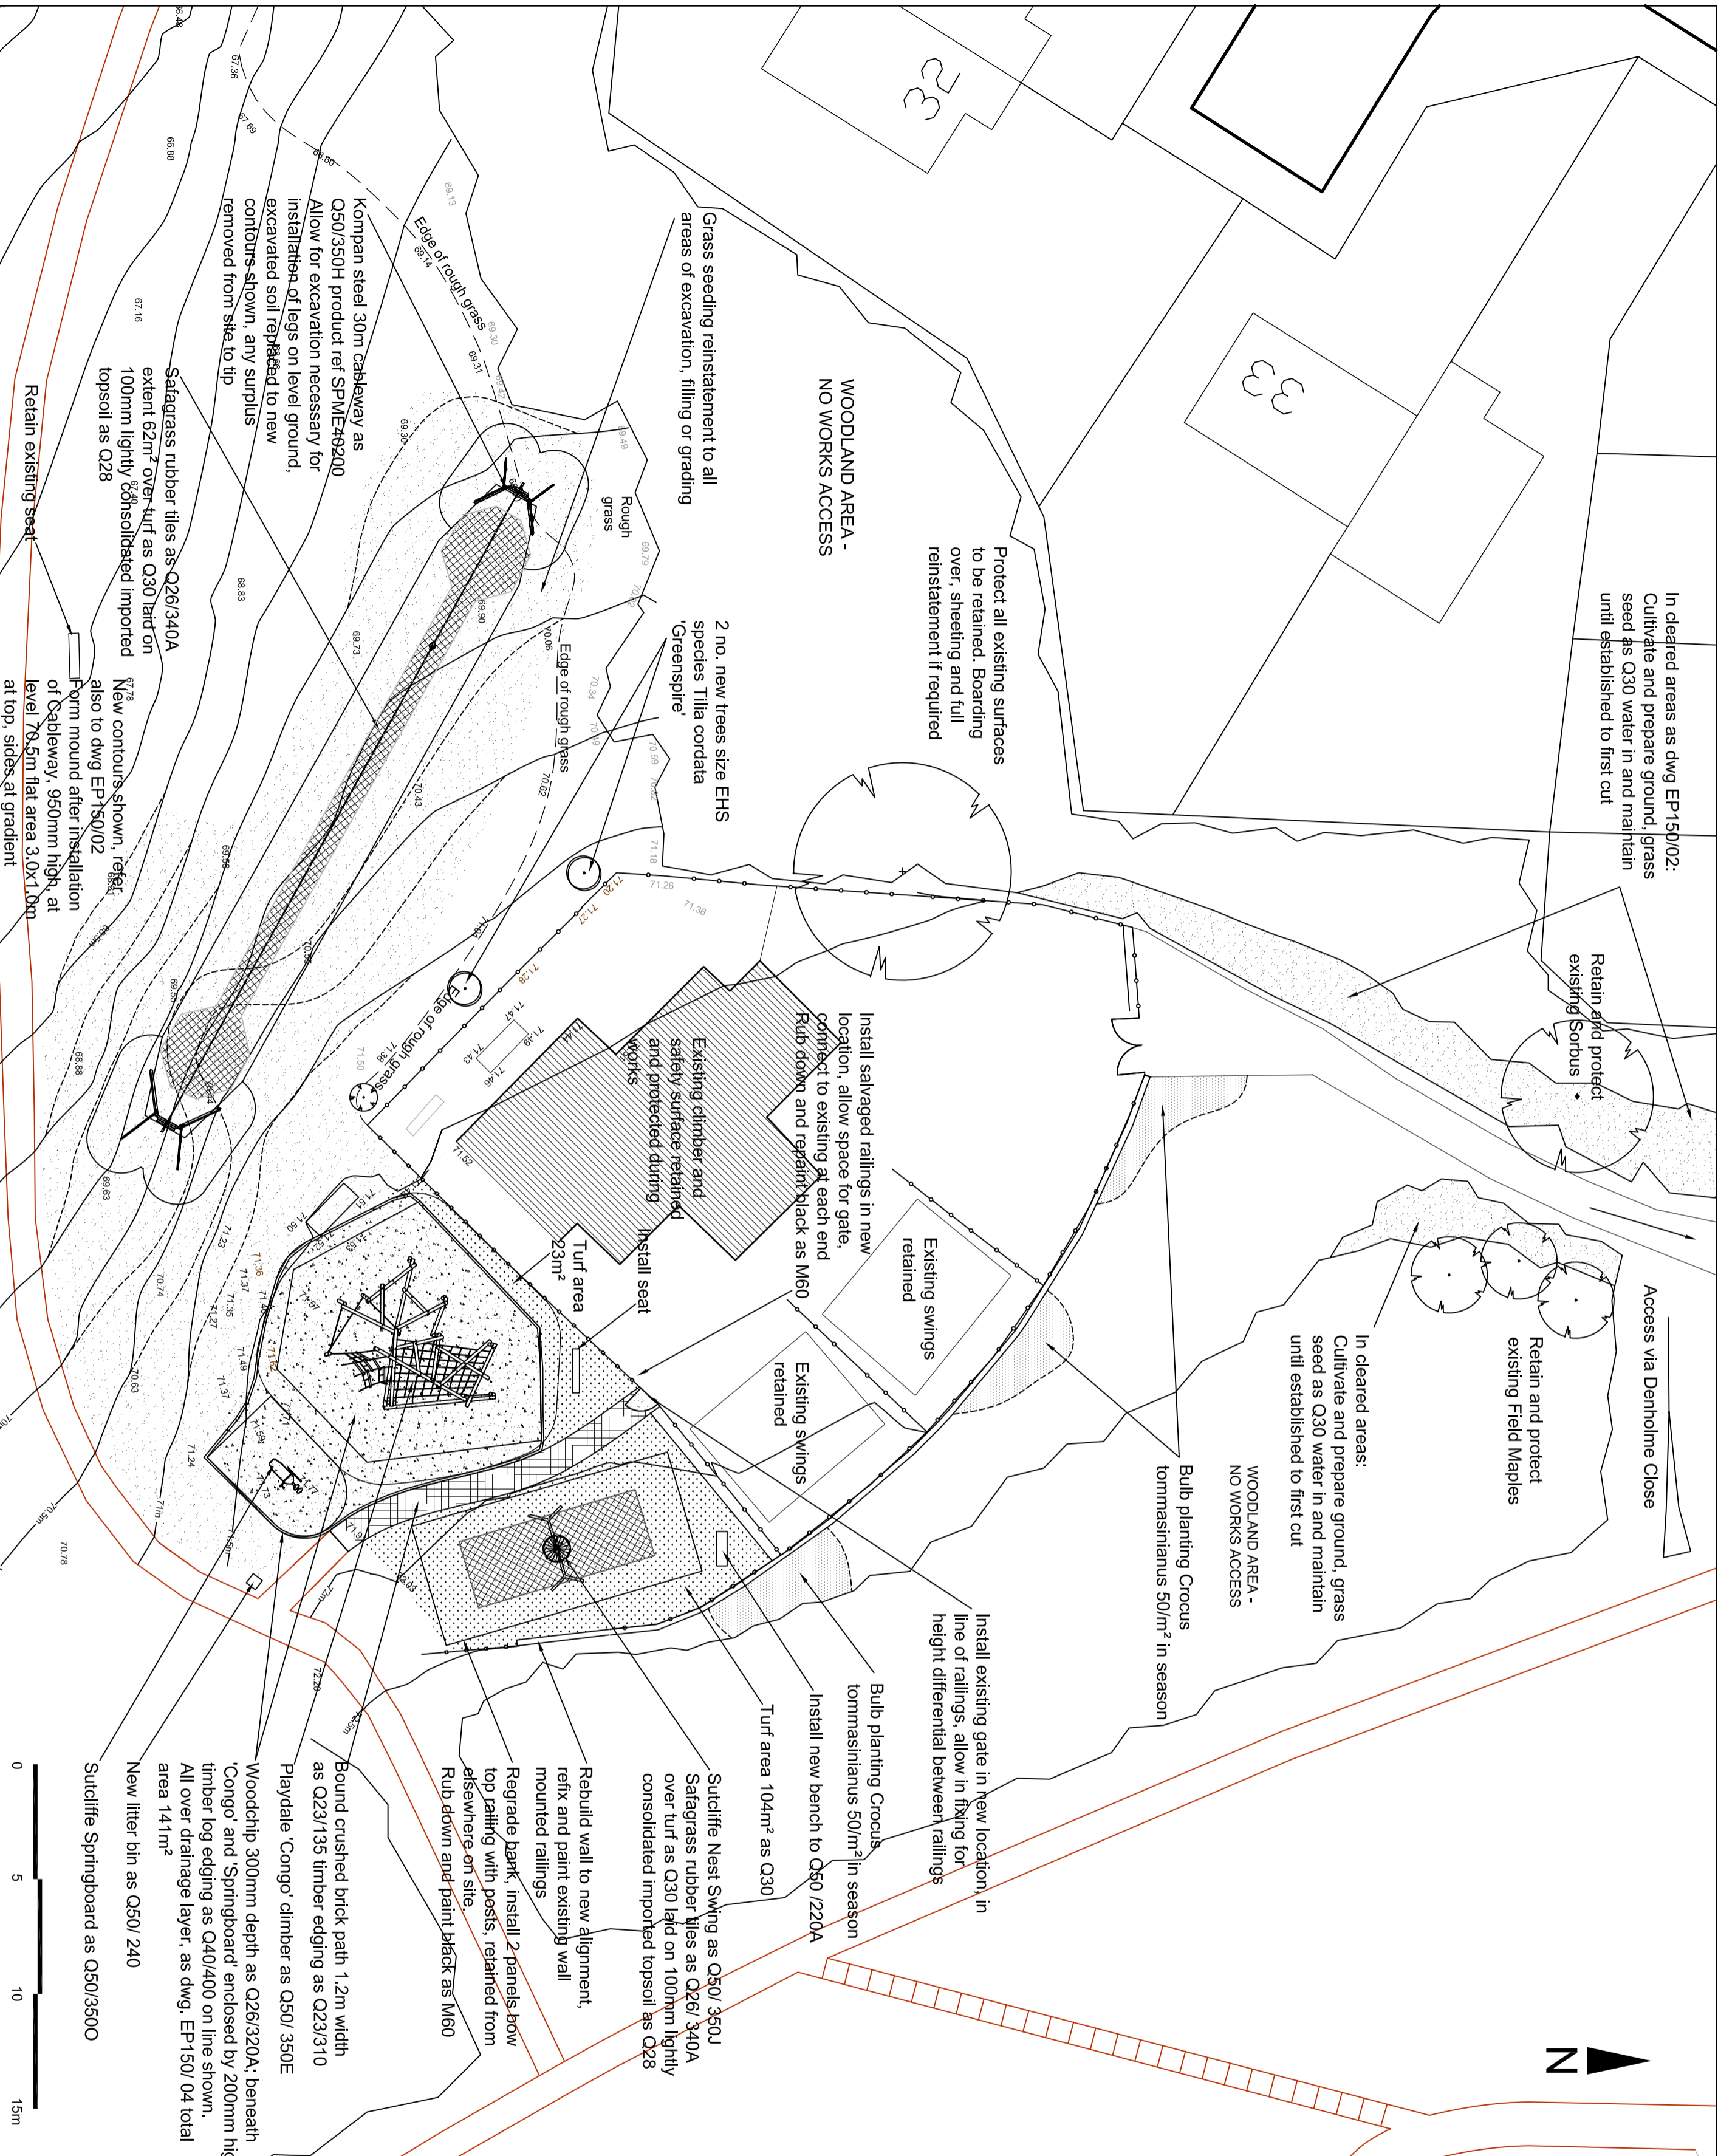













**NOTES / REVISIONS:**

Copyright Sheffield City Council. All rights reserved in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted

The map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office. © Crown Copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. 10018910; 2019

**KEY**

-  Existing contours
-  Proposed contours
-  Install retained bow top railings
-  Log edge to woodchip area
-  Woodchip play safety surface
-  Turfing
-  Rubber matting over new turf
-  Bulb planting
-  Bound gravel path
-  Existing trees - protect all on site
-  New trees
-  Grass reinstatement by seeding

**SHEFFIELD CITY COUNCIL  
DEVELOPMENT SERVICES**

Director  
L STURCH, MRTPI

**PLAY PROJECT YEAR 2  
DENHOLME CLOSE**

**PLAYGROUND LAYOUT  
TENDER ISSUE**

COMMITTEE: P&C

SCALE: 1:200@A2

DR	TR	CHKD	DATE:	SCALE:
MP		CDJ	12/07/10	1:200@A2

Drawing No: A3/EP150/03

CAD FILE NAME: